Push Buttons

RF908-RE-MO-32D
Momentary
RF908-RE-MA-32D
Maintained
$154.00

RF908-RE-TD-32D
Electronic Time Delay
$238.00

Tamper-Resistant
Handicap Pushbutton

RF916-N-MAx4
Narrow Style
Maintained (2-SPST)
$174.00

Tamper-Resistant
Exit Pushbuttons

RF918RE-MA-28
Maintained (2-SPST)
$168.00

RF918RE-MO-28
Momentary (2-SPST)
$168.00

RF918RE-TD-28
Time-Delay (DPDT)
$252.00

All-In-One Illuminated Push Button

- LED bulb 2" push button
- Three lenses (green, red, & clear)
- Three messages:
  EXIT, PUSH TO EXIT, OCCUPIED WHEN LIT
- Handicap symbol.

RF972L-ES-MO-32D
Momentary (2-SPST)
$73.00

991 Pneumatic Time Delay Handicap Pushbutton

Standard:
2-3/4"W x 4-1/2"H

Narrow:
1-3/4"W x 4-1/2"H

PUSH TO EXIT
RF991-REPTTDX32D
Single Gang, Red
$471.00

PUSH TO EXIT
RF991N-REPTTDX32D
Narrow, Red
$471.00

HANDICAP LOGO
RF991-BHPTTDX32D
Single Gang, Blue
$471.00

HANDICAP LOGO
RF991N-BHPTTDX32D
Narrow, Blue
$471.00

Key Switch

- Tamper-Resistant Keyswitch
- Momentary (SPDT/DPDT)
- Brushed Anodized Aluminum (28)

Standard: 3"W x 4-3/4"H

RF960-MOx28	**RF960-MAx28**
Momentary	Maintained
$145.00	$145.00

Narrow : 1-5/8"W x 4-3/4"H

RF960N-MOx28	**RF960N-MAx28**
Momentary	Maintained
$145.00	$145.00

With Reset/Override

RF960RO-MOMOx28
Standard: 3"W x 4-3/4"H
$183.00

Battery Powered Touch-free Actuator

(glass & marble surfaces)
912GL-WBT: 3.375"x 3.375"x 0.565"

RF912GL-WBT
$301.00

Receiver
RF912R
$108.00

Touchless Switch

Designed for touchless door activation in any facility.
It functions by triggering activation of automatic door openers by hand gesture or use of a remote fob. It can make the difference when it comes to a clean, hygienic facility.

Single Gang
RF910TC
$161.00

Narrow
RF910NTC
$161.00

Transmitter
RF910TC-WRB
$55.00

Receiver
RF910TC-WRM
$108.00

Vertical Rod Strike

Simple locking solution for surface vertical rod exit devices that have a Pullman style latch.

RFVR166
$442.00

RFVR166LMKM
Latch & Keeper Monitor
$489.00

Compact Electromechanical Lock

For inswing doors & small enclosures.
8-5/8"w x 1-7/16"h x 1-3/8"D

RFMEM2400
$373.00

Rack Handle

The 3525 rack handle provides intelligent electronic locking and monitoring capabilities. The electronic locking rack handle provides the functionality of a manual latching system with the added benefit of electronic locking for access control and remote access control monitoring. Integrated lock sensors provide local LED indication plus generate output signals for remote monitoring.

RF3525
$619.00

Electromechanical Rack Handle Lock

With proximity Reader

Provides intelligent electronic locking and monitoring capabilities

12-24VDC BLACK

RF3525PRX
$750.00

Rocker Switch

Momentary & Maintained Field Selectable

- Ideal for desk or wall mount applications
- Surface-mounts under desk or counter for concealment
- Smooth action rocker with key symbol
- Surface-Mount:
  2-7/16"W x 2-7/16"H x 7/8"D
- Flush-Mount:
  3-7/16"W x 3-7/16"H x 5/8"D

RF909S-MO $67.00
Surface Mount Rocker Switch

RF909F-MO $67.00
Flush Mount Rocker Switch

Recessed Magnetic Contact

- Self-locking in steel and wood
- ¾" diameter recessed magnetic contact
- Features an open/closed loop type.
- 200mA Max, 30VAC/VDC
- 3/4"W x 3/4"H x 7/8"D

RF9540B
$36.00

Electromechanical Cabinet Lock

The 3510LM cabinet lock features a compact, surface-mounted design for small enclosures. this electric lock has side or top mounting capability for easy installation which makes it suitable for a variety of applications. positioning of the RCI 3510LM cabinet locking pin determines the lock mode.

Field-Selectable
Fail-Safe & Fail-Secure

RF3510LM
$149.00

Electrical Cabinet Lock

For Small Enclosures

1-1/8"D x 1-3/16"W x 2-7/8"L

- Surface-mounted compact electric lock
- Field selectable fail locked or fail unlocked assembly
- Dual voltage 12/24vdc
- Plated (rust-resistant) self adjusting steel locking pin assembly
- 440 lbs. or 200 kg. holding force
- Low energy consumption (184ma @ 12vdc, 90ma @ 24vdc)
- Superior heavy duty metal construction
- Black finish

RF3513
$148.00

Proximity Slimline Reader

- Single door standalone access control solutions for surface or mullion mount applications
- Supports up to 10,000 users
- Access validation – silent/audible/visual
- 1-1/2"w x 3-1/16"h x 1/2"D

RF9320
$388.00

Relay Board

Input & output terminals designed to control low voltage supply

12/24 selectable
LED indicators
SPDT output
10A rated

R9310RB
$27.00

The pricing in this catalog is from December 2024. Prices are subject to change. Check our website, or call for current pricing.

4 Series - Centerline Strikes

4107 Series - Fail Secure

Radius Corner: 5/32”

1-1/4"W x 6 7/8”

For commercial and residential use with aluminum frames

- Enlarged latch cavity provides compatibility with all lock types, up to 3/4" latch projection (including 3-piece anti-friction).
- Shallow depth accommodates most metal frame profiles with round corners for ease of installation in aluminum frames.
- Prevents damage caused by crossed wires.
- Reduces installation time.
- Design ensures dead locking with all lock types.
- Stainless steel face and mounting plate.
- Use with door thickness: 1-3/8" To 2-3/8".

Brushed Stainless Steel

Part #	Voltage	Price
RF4107-01x32D	11/16VAC	$222.00
RF4107-05x32D	12VAC/DC	
RF4107-08x32D	24VAC/DC	

4108 Series - Fail Secure

1-7/16"W x 7-15/16”

For commercial and residential use with aluminum frames

- Enlarged latch cavity provides compatibility with all lock types, up to 3/4" latch projection (including 3-piece anti-friction).
- Shallow depth accommodates most metal and wood frame profiles with round corners.
- Prevents damage caused by crossed wires.
- Reduced installation time.
- Design ensures dead locking with all lock types.
- Stainless steel face and mounting plate.
- Use with door thicknesses: 1-3/8" to 2-3/8".

Brushed Stainless Steel

Part #	Voltage	Price
RF4108-01x32D	11/16VAC	$233.00
RF4108-05x32D	12VAC/DC	
RF4108-08x32D	24VAC/DC	

Accommodates 3/4" (19mm) latch projection. various faceplate options available to accommodate most frame types.

How To Order:

Voltage

11-16VAC-	01
12VAC/VDC-	05
24VAC/VDC-	08
12VDC-	06
24VDC-	09

Options

Fire-Rated-- F

Fail-Secure-- 1

Fail-Safe-- 3

Mode

4 - x 32D

07	--1-1/4”W x 6-7/8”H, Radius Corners
08	--1-7/16”W x 7-15/16”H, Rad. Corners
14	--1-1/4”W x 4-7/8”H, ANSI Sq. Corners
19	--1-3/8”W x 9”H, Square Corners

Faceplate

Insert Depth: 1-1/2"D (38mm)

4114 Series - Fail Secure

4314 Series - Fail Safe

ANSI Square Corner

1-1/4”W x 4 7/8”

For commercial and residential use with hollow metal frames

- Enlarged latch cavity provides compatibility with all lock types, up to 3/4" latch projection (including 3-piece anti-friction).
- Shallow depth accommodates most metal frame profiles with square corners for ease of installation in hollow metal frames.
- Use with door thicknesses: 1-3/8" to 2-3/8".
- ANSI size, thickness and lip bracket minimized installation time in all standard door frames.
- Design ensures dead locking with all lock types.
- Stainless steel face and mounting plate

Brushed Stainless Steel

Part #	Voltage	Price
RF4114-01x32D	11/16VAC	$216.00
RF4114-05x32D	12VAC/DC	
RF4114-08x32D	24VAC/DC	
RF4314-06x32D	12VDC	$233.00
RF4314-09x32D	24VDC	

4119 Series - Fail Secure

Square Corner

1-3/8"W x 9”

For commercial and residential use with aluminum frames

- Enlarged latch cavity provides compatibility with all lock types, up to 3/4" latch projection (including 3-piece anti-friction).

RF4119-08x32D

24VAC/DC

$279.00

7 Series - Centerline Strikes

7107 Series - Fail Secure

For commercial and residential retrofit use with aluminum or wood frames

1-1/4"W x 6 7/8"
Radius Corner: 5/32"

- Enlarged to accommodate cylindrical and narrow line aluminum door lock types, up to 5/8" projection.
- Shallow depth accommodates most metal and wood frame profiles with round corners for ease of installation in hollow metal frames.
- Use with door thicknesses: 1 3/8" to 2 3/8".
- Prevents damage caused by crossed wires.
- Reduced installation time due to proper face/mounting plate thickness and 7 series chassis matched to fit ansi lip sizes.
- Proper operation is ensured after installation, by 'horizontal adjustment'.
- Design ensures dead locking with all lock types.
- Stainless steel face and mounting plate

Brushed Stainless Steel

Part #	Voltage	Price
RF7107-01x32D	11/16VAC	$212.00
RF7107-05Dx32D	12VDC	
RF7107-07x32D	24VAC	
RF7107-08Dx32D	24VDC	

7108 Series - Fail Secure

For commercial and residential use with aluminum frames

1-7/16"W x 7-15/16"
Radius Corner: 5/32"

- Enlarged to accommodate cylindrical and narrow line aluminum door lock types, up to 5/8" projection.
- Shallow depth accommodates most metal and wood frame profiles with round corners for ease of installation in hollow metal frames.
- Use with door thicknesses: 1 3/8" to 2 3/8".
- Prevents damage caused by crossed wires.
- Reduced installation time due to proper face/mounting plate thickness and 7 series chassis matched to fit ansi lip sizes.
- Proper operation is ensured after installation, by 'horizontal adjustment'.
- Design ensures dead locking with all lock types.
- Stainless steel face and mounting plate

Brushed Stainless Steel

Part #	Voltage	Price
RF7108-01x32D	11/16VAC	$221.00
RF7108-05Dx32D	12VDC	
RF7108-08Dx32D	24VDC	

Accommodates 5/8" (16mm) latch projection. various faceplate options available to accommodate most frame types.

How To Order:

Voltage

11-16VAC-	01
12VDC-	05D
24VAC-	07
24VDC-	08D
12VDC-	06
24VDC-	09

Insert Depth:
1-1/2"D (38mm)

7			-		x 32D
Fail-Secure--	1	04		--1-1/4"W x 4-7/8"H, ANSI Radius Corners	
Fail-Safe--	3	07		--1-1/4"W x 6-7/8"H, Radius Corners	
Mode		08		--1-7/16"W x 7-15/16"H, Rad. Corners	
		14		--1-1/4"W x 4-7/8"H, ANSI Sq. Corners	
		19		--1-3/8"W x 9"H, Square Corners	

Faceplate

7114 Series - Fail Secure
7314 Series - Fail Safe

For commercial and residential use with hollow metal frames

1-1/4"W x 4-7/8"
ANSI Square Corner

- Enlarged latch cavity provides compatibility with all lock types, up to 3/4" latch projection (including 3-piece anti-friction).
- Shallow depth accommodates most metal frame profiles with square corners for ease of installation in hollow metal frames.
- Use with door thicknesses: 1-3/8" to 2-3/8".
- ANSI size, thickness and lip bracket minimized installation time in all standard door frames.
- Design ensures dead locking with all lock types.
- Stainless steel face and mounting plate

Brushed Stainless Steel

Part #	Voltage	Price
RF7114-01x32D	11/16VAC	$205.00
RF7114-05Dx32D	12VDC	
RF7114-07x32D	24VAC	
RF7114-08Dx32D	24VDC	
RF7314-06x32D	12VDC	$218.00
RF7314-09x32D	24VDC	

7104 Series - Fail Secure

For comm. and residential retrofit use with alum. or wood frames

1-1/4"W x 4-7/8"
ANSI Radius Cnr: 5/32"

- Enlarged latch cavity provides compatibility with all lock types, up to 5/8" latch projection (including 3-piece anti-friction).

RF7104-01x32D
11-16VAC
$205.00

The pricing in this catalog is from December 2024. Prices are subject to change. Check our website, or call for current pricing.

6 Series Heavy Duty Strikes

For use with narrowline aluminum, cylindrical, centerline mortise locks and mortise exit devices

- 1/4" horizontal adjustment
- Accomodates 3/4" (s - standard profile or 1/2" or 5/8" (l - low profile) latch projection
- Field selectable voltage input - accomodates 12/24vdc and 12 to 24vac (even 16VAC) in one strike! Non-handed
- Field selectable lock mode-choose fail locked or fail unlocked with the turn of a dial (fail unlocked required dc)
- Stainless steel faceplate
- Modular "plug-in" wire connectors for fast hook-up
- 1-3/16" (S), 1-1/16" (L) Depth

How To Order:

Options: LMLK --Latch And Keeper Monitor

Profile		65		x	32D
Standard--	S		07		--1-1/4"W x 6-7/8"H, Radius Corners
Low Profile--	L		08		--1-7/16"W x 7-15/16"H, Rad. Corners
			14		--1-1/4"W x 4-7/8"H, ANSI Sq. Corners

Faceplate

S6507 - Standard Profile
L6507 - Low Profile

- Use with aluminum locks, centerline mortise exit devices, cylindrical or centerline mortise locks
- For aluminum or wood frames
- Plate: 1-1/4" x 6-7/8"
- Depth: 1-3/16" (S), 1-1/16" (L)

Radius Corner: 5/32"

Brushed Stainless Steel

Part #	Profile	Price
RFL6507x32	Low Profile	$227.00
RFS6507x32	Std. Profile	

S6514 - Standard Profile
L6514 - Low Profile

- Use with centerline mortise exit devices, cylindrical or centerline mortise locks
- For hollow metal frames
- Plate: 1-1/4" x 4-7/8"
- Depth: 1-3/16" (S), 1-1/16" (L)

Square Corner

Brushed Stainless Steel

Part #	Profile	Price
RFL6514x32	Low Profile	$220.00
RFS6514x32	Std. Profile	
RFL6514xLMKMx32	Low Profile	$281.00
RFS6514xLMKMx32	Std. Profile	

S6508 - Standard Profile
L6508 - Low Profile

- Use with aluminum locks, centerline mortise exit devices, cylindrical or centerline mortise locks
- For aluminum or wood frames
- Plate: 1-7/16" x 7-15/16"
- Depth: 1-3/16" (S), 1-1/16" (L)

Radius Corner: 5/32"

Brushed Stainless Steel

Part #	Profile	Price
RFL6508x32	Low Profile	$236.00
RFS6508x32	Std. Profile	

S65 Series JIG, Standard Profile

works with S6504, S6514

S6JIG

$95.00

6 Series Universal Packs

(comes with 04,14,08) faceplates

Part #		Price
RFS65U-32D	3/4"	$254.00
RFL65U-32D	5/8"	$254.00

Modular Strike Faceplates

For Series 4/7/6

How To Order: B - 32D

Series: 6 --6 Series; 47 --4 & 7 Series

Faceplate:

04	--1-1/4"W x 4-7/8"H, Radius Corners
05	--1-1/8"W x 5-7/8"H, Radius Corners
07	--1-1/4"W x 6-7/8"H, Radius Corners
08	--1-7/16"W x 7-15/16"H, Rad. Corners
14	--1-1/4"W x 4-7/8"H, ANSI Sq. Corners
19	--1-3/8"W x 9"H, ANSI Sq. Corners

Series 4 & 7 Faceplates

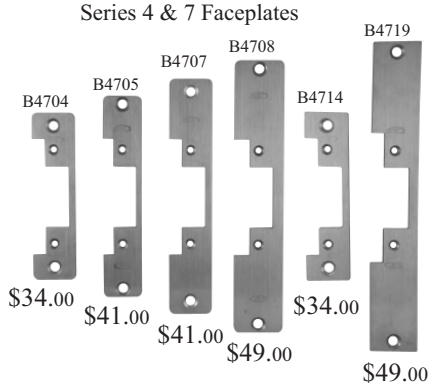

Series 6 Faceplates

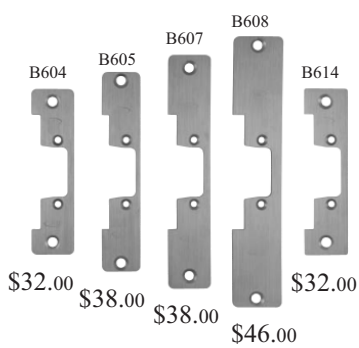

F1 Series F1114/F1119 Centerline Strikes

The F1 series of centerline strikes are made of stainless steel and feature a faceplate with square corners.
The F1114 is ideal for hollow metal frames and the F1119 is best utilized with aluminum and wood frames.
These centerline strikes are saddle-mounted for enhanced strength and allow up to a 1/4"' horizontal adjustment to relieve side-load pressure and ensure proper latch Alignment.
The F1 series electric strikes are built with a unique anti-vibration feature built-in and a "pry-fuard" For tamper-resistance. Fail Secure.

1-1/4"W x 4-7/8"H

Part #	Voltage	Price
RFF1114-01x32D	11/16VAC	$592.00
RFF1114-05x32D	12VAC/DC	
RFF1114-08x32D	24VAC/DC	

1-3/8"W x 9"H

Accommodates 1/2", 5/8" or 3/4" Latch Projection

Insert Depth: 1-3/4"

Part #	Voltage	Price
RFF1119-01x32D	11/16VAC	$668.00
RFF1119-05x32D	12VAC/DC	
RFF1119-08x32D	24VAC/DC	

F2 Series All-In-One

- Modular design allows compatibility with most locks without having to order special faceplates
- Adjustable deadbolt keeper and dead latch ramp
- Heavy-duty stainless steel construction with 32d finish (brushed stainless steel)
- Up to 1500 lbs (680kg) holding force
- Fits HES 1006 (1003) frame cutout
- Accommodates 3/4" latch projection
- Faceplate (and screws) included for centerline latch entry
- Unique sliding shim design for up to 1/8" (3mm) horizontal adjustment for misaligned frames
- Vertical adjustability of strike for precise positioning of lockset
- Accommodates up to 1 " deadbolt**
- Field selectable voltage input-accommodates 12 or 24vdc & 12-24vac
- Anti-tamper security screws
- All installation drivers included
- Optional latch monitor kit
- Low current draw (0 19 amps @24vdc)
- "cool keeper" solenoid design prevents keeper from heating up
- Plug-in wire connector
- Trim plate included
- Adhesive paper template included
- Non-handed
- 5 year limited warranty

UL 10C, 3 Hour Fire-Rated (Fail Secure Only)
UL 1034, Burglary-Resistant Listed

**Night-Latch Function Only, Bolt Will Not Release

1-1/4" x 4-7/8"

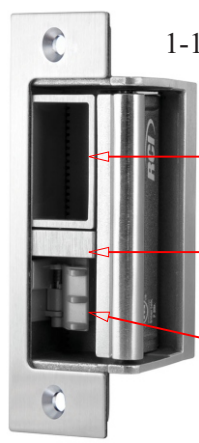

RFF2164-32D $737.00

Model 0162 For Rim Exit Device

12-24VAC/DC

- Compatible with most major exit devices
- Accommodates exit devices w/latch projections (from 1/2" to 3/4")
- No frame cutting required - surface mounted
- Ensure proper latch alignement with horizontal adjustment up to 1/4" to compensate for door misalignements
- Allen hed cap screws for added support and tamper resistance
- Field selectable voltage input - 12 or 24vdc and 12 or 24vac (even 11 to 16vac)
- Horizontal solenoid prevents manipulation by vibration
- Conventional keeper design - promotes even load distribution
- Modular plug-in wire connectors
- Selectively brushed stainless steel finish
- Non-handed for right or left hand doors
- 1/16" spacer included
- 5 year limited warranty

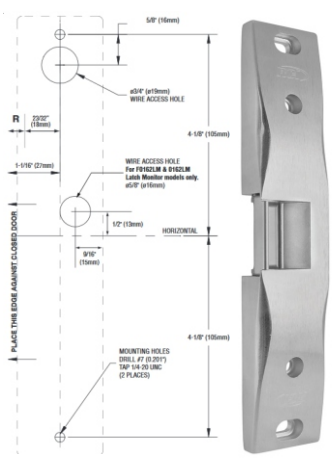

$639.00 **RF0162-32D**

0161 Semi-Mortise Rim

The 0161 is a 3/4" semi-mortise electric strike that is designed to operate with pullman latch rim exit devices.
The stainless-steel finish creates a sleek attractive architectural appearance.
The slotted horizontal holes on the faceplate allow for easy and secure mounting during installation and correct alignment with the exit device.
It features a hazard-free radius design.

1-3/4"Wx9"Hx1-5/8"D

Part #	Voltage	Price
RF0161-05x32D	12VDC	$391.00
RF0161-08x32D	24VAC	

The pricing in this catalog is from December 2024. Prices are subject to change. Check our website, or call for current pricing.

8 Series Electromagnetic Locks

Life Safe
Incorporates no latches or pin-like mechanisms, ensuring instant release and conforming to building code standards. consult your local building inspector for state and federal codes.

Fail Safe
Unlocks instantly when electricity is discontinued by access control equipment, fire panel deactivation or power failure. Consult your local fire marshall for state and federal codes.

Fire Safe
Series 8310, 8310-101, 8310M-101, 8320-101, 8320, 8330, 8340 have to conform to the following certifications: UL/ULC, NFPA, BOCA, UBC, California State Fire Marshall (CSFM) and New York MEA.

Armature Plate Holder for 8310
RFAH-10x28
$114.00

Model 8310, 8310-101, 8310M-101 MultiMag® Single Electromagnetic Lock

- Dual Voltage 12VDC/24VDC • Adjustable Mounting Bracket
- Mov Surge Protection • 1500 Lbs. Holding Force (On-The-Door Test)
- Anodized Clear Aluminum or Dark Bronze Finish
- 1 5/8"D x 2 5/8"W x 10 1/2"L Surface Mounted
- Used with single outswinging doors or pairs of doors using split armature kit SA01 (Inswinging Doors Require A "Z" Bracket Kit). 101 series for time-delayed egress (contact factory for available options).

Available Options:
- DSS - Door Status Sensor • SCS - Security Condition Sensor C/W LED
- Combination DSS/LSS And DSS/SCS • Mounting Accessories • Special Finishes

1200 lb

RF8310X28
$648.00

RF8310X40
$701.00

Model 8320, 8320-101 MultiMag® Double Electromagnetic Lock

- Dual Voltage 12VDC/24VDC • Adjustable Mounting Bracket • Mov Surge Protection
- 1500 Lbs. Holding Force (On-The-Door Test) • Anodized Clear Aluminum Or Dark Bronze Finish • 1-5/8"D x 2 5/8"W x 21"L Surface Mounted • Used with pairs of outswinging doors without a mullion (Inswinging Doors Require 2 "Z" Bracket Kits). 101 Series for time-delayed egress (contact factory for available options)

Available Options:
- 2-DSS - Door Status Sensor • 2-LSS - Lock Status Sensor C/W LED • 2-SCS - Security Condition Sensor C/W LED • Combination 2-DSS/LSS And 2-DSS/SCS

RF8320x28
$1,290.00

Model 8360 Mortise MiniMag® Sliding Electromagnetic Lock

- Dual Voltage 12VDC/24VDC • RLS - Remote lock status • mov surge protection
- 750 lbs. holding force (on-the-door test) • used with single sliding doors
- anodized clear aluminum finish • 1"d x 1 1/2"w x 9"l mortise mounted

750 lb

RF8360x28
$539.00

Model 8371 Surface MiniMag® Single Mini Magnet Electromagnetic Lock

- Dual Voltage 12VDC/24VDC • Adjustable Mounting Bracket • MOV Surge Prot.
- 1"D x 1 7/8"W x 9 3/8"L Surface Mounted • Used With Single Outswinging Doors For Traffic Control (Inswinging Doors Require A "Z" Bracket Kit)

Available Options:
- Mounting Accessories • Special Finishes • LSS

750 lb

RF8371x28
$483.00

Door Status Sensor
RF8371DSSx28
$546.00

Security Condition Sensor
RF8371SCSx28
$565.00

Model 8372 Surface MiniMag® Dbl Mini Magnet Electromagnetic Lock

- Dual Voltage 12VDC/24VDC • MOV surge protection (on-the-door test)
- Used with double outswinging interior or perimeter doors without mullions.
- Anodized clear aluminum finish
- 1"D x 1-7/8"W x 18-3/4"L surface mounted

RF8372x28
$963.00

Door Status Sensor
RF8372DSSx28
$1,088.00

Security Condition Sensor
RF8372SCSx28
$1,128.00

Model 8375 Surface MicroMag™ Electromagnetic Lock

- Dual Voltage 12VDC/24VDC • Adjustable mounting bracket • mov surge protection
- 300 Lbs. Holding Force (On-The-Door Test) • anodized clear aluminum finish
- 13/16"D x 1-1/2"W X 6-17/32"L surface mounted • used with cabinets, drawers, etc. For traffic control (inswinging doors require a "Z" Bracket Kit).

300 lb

RF8375x28
$342.00

Filler Bars

For 8 Series Electromagnetic Locks

For frame stops narrower than 2" (51mm).
- Available in brushed anodized aluminum (28)

RKFB-02-28 $49.00
3/8"H x 3/4"W x 10-1/2"L
Compatible with 8310

RKFB-03-28 $52.00
1/2"H x 3/4"W x 10-1/2"L
Compatible with 8310

RKFB-711-28 $49.00
3/8"H x 3/4"W x 9-3/8"L
Compatible with 8371